


- Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

Notes:

1. Both diameters (max and core) and reeling direction depends on valid feeding machine and product;
2. Dimensions depends on valid feeding machine and product;
3. Depth of the nest and thickness of the liner depends on valid feeding machine and product;
4. Quantity of per packing unit: 485 pcs/roll;
5. Leader length: 408mm=17 pockets;
6. Trailer length: 48mm=2 pockets

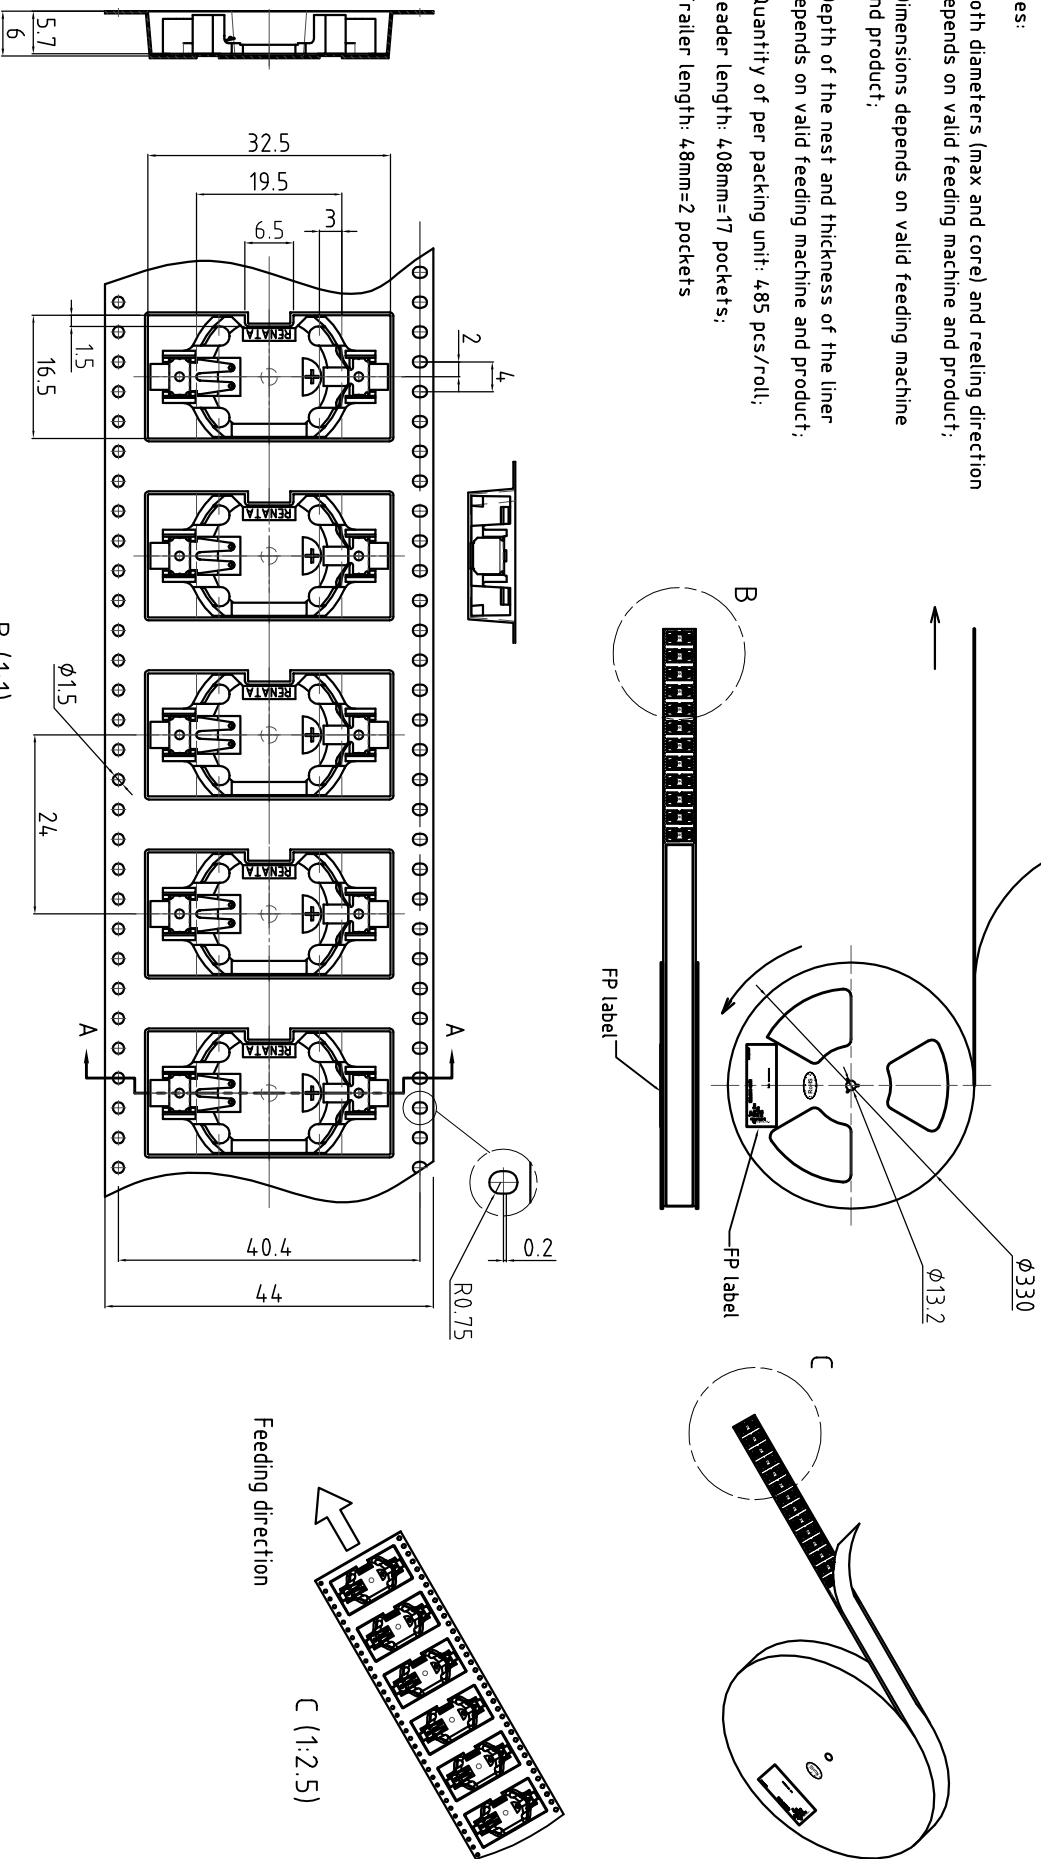

- Samples can deviate in the execution from the serie.

4	Battery holder	SM2x2016-LF		701113
3	Lobrel	RUR-27-3-XV (44mm)	High impact polystyrene	
2	Cover tape	UP-170-375 07108	Antistatic polyester film	
1	Carrier tape	3117-3MB-0003-0N	Black Conductive Polystyrene Alloy	
Pos.	Qty	Description	Type	Material / Request No.
				Remark

Rev.	○	Rev.	○	Customer's Approval
Rev.	○	Rev.	○	Date 19.08.2008
Rev.	○	Rev.	○	Signature SRI
Titel: Tape & Reel				Scale 1:10
				Drawn 12.08.08 WU Ping
				Checked 15.08.08 SRI
				Approved

SM2x2016-LF TR
CH-4452 Itingen
Switzerland
10.0324.4-